S CLASS

cm

75

Summa

Summa

Summa

TSERIES

True Tangential™ Vinyl Cutters

DSERIES

Superior Drag-knife Vinyl Cutters



SUMMA S CLASS FEATURES



SelectTouch™ Control Center

The new touch-sensitive control panel puts every advanced feature at your fingertips by way of a clear, crisp high-contrast SelectTouch display.



ariable-Tension Pinch Rollers

User-selectable pinch-roller pressure gives you superior tracking over a wide range of vinyl, screen-lithe, polyester and paper. Whether you're loading thick or thin material, you'll get legendary Summa tracking accuracy every time.



Dual Cutting Strip

Separate cut and pounce protection strips let you switch from cut and pounce mode without changing your protection strip Now going from cut to pounce is as easy as swapping a blade for a pen, making Summa S Class cutters as easy as they are



OPOS™ X Print-Cut Alignment

The world's best and best-selling optical alignment system is now even better. OPOS X features a more advance optical scanner that's capable of reading registration marks on an even wider range of output.



Auto Cut-Off Knife

The totally redesigned D-Series cutting head includes a new auto sheet-off knife, which you can optionally set to slice your media at the end of each job.



Offset Media Support Rollers


The new media support rollers are now offset to hold roll-fed materials more securely. Now you can cut at top speeds without fear of your roll being pulled off its rack.

SUMMA S CLASS

The versatile new Summa S Class unites power and precision with an affordable and efficient drag-knife cutting head or a state-of-the-art True Tangential cutting™ head. It employs our most powerful servo-motors yet and Summa's exclusive MicroSprocket™ drive to let you cut with amazing speed, confidence and precision. Coupled with an astonishing array of innovations and built in capabilities, Summa S Class does more than any other cutter in its class. *Precisely*.

S CLASS

Cut More. Precisely.™

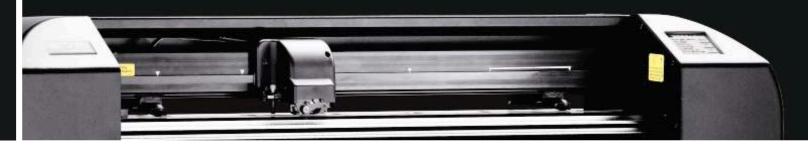

TRUE TANGENTIAL¹

With its motor-controlled blade, you'll get superior cut-quality for faster, easier weeding, and the power to cut thicker materials with ease




TOUCH-SCREEN CONTROLS

Point-and-click controls take the gues work out of navigating cutter function



Our exclusive MicroSprocket" drive drum delivers tracking accuracy that's become the industry standard for longdistance tracking.





OPOS X

OPOS includes our new X-laser sensor for accurate die-cutting on a wide range of output with or without lamination.



Dual protection strips and a multiposition tool holder make it a snap to grow cut mode to pounce mode.



SUMMA 575



MEDIA WIDTH 6 cm - 84 cm

MAX. WORKING AREA 74.2 cm x 50 m

SPEED

Up to 1000 mm/sec (axial)
Up to 1414 mm/sec (diagonal)

ACCELERATION

Up to 4 g (axial)
Up to 5.5 g (diagonal)

KNIFE PRESSURE

D-Series: 0-400 grams, in 5-gram increments T-Series: 0-600 grams, in 5-gram increments

MEDIA THICKNESS

D-Series: 0.05 mm to 0.25 mm (0.8 mm with optional sandblast knife)
T-Series: 0.05 mm to 1.2 mm

REPEATABILITY

 $\pm\,0.1$ mm on plots up to 12 m long

INTERFACE

USB 1.1 & Serial RS-232 (up to 57.600 baud)

DATA BUFFER 16MB

HxWxD

11444

111 cm x 141 cm x 68 cm

SUMMA SIZO



MEDIA WIDTH 11.5 cm - 130 cm

MAX. WORKING AREA

SPEED

Up to 1000 mm/sec (axial) Up to 1414 mm/sec (diagonal)

ACCELERATION

Up to 4 g (axial)
Up to 5.5 g (diagonal)

KNIFE PRESSURE

D-Series: 0-400 grams, in 5-gram increments T-Series: 0-600 grams, in 5-gram increments

MEDIA THICKNESS

D-Series: 0.05 mm to 0.25 mm (0.8 mm with optional sandblast knife)
T-Series: 0.05 mm to 1.2 mm

REPEATABILITY

±0.1 mm on plots

a) up to 12 m long using vinyl < 76 cm wide b) up to 4 m long using vinyl > 76 cm wide

INTERFACE

USB 1.1 & Serial RS-232 (up to 57.600 baud)

DATA BUFFER

16MB

HxWxD

111 cm x 187 cm x 68 cm

SUMMA S160



MEDIA WIDTH

17 cm - 168 cm

MAX. WORKING AREA

SPEED

Up to 1000 mm/sec (axial)
Up to 1414 mm/sec (diagonal)

ACCELERATION

Up to 4 g (axial)
Up to 5.5 g (diagonal)

KNIFE PRESSURE

D-Series: 0-400 grams, in 5-gram increments T-Series: 0-600 grams, in 5-gram increments

MEDIA THICKNESS

D-Series: 0.05 mm to 0.25 mm (0.8 mm with optional sandblast knife)
T-Series: 0.05 mm to 1.2 mm

REPEATABILITY

±0.1 mm on plots

a) up to 12 m long using vinyl <76 cm wide b) up to 4 m long using vinyl > 76 cm wide

INTERFACE

USB 1.1 & Serial RS-232 (up to 57.600 baud)

DATA BUFFER

16MB

HxWxD

111 cm x 225 cm x 68 cm

T SERIES

The powerful new T Series gives you Summa S Class power and precision with a state-of-the-art True Tangential™ cutting head.

DSERIES

The versatile new D-Series unites speed and precision with an affordable and efficient drag-knife cutting head.

YOUR SUMMA DEALER

Summa

Rochesterlaan 6 8470 Gistel, Belgium Telephone: 32 59 270011

www.summa.be